

DVANTAGE IS TO YOUR E
4060mm 2180mm 2050mm
3900mm 2020mm 1850mm
3 Pallet capacity
*1177kg
100mm 80mm 80mm

Side door	Passenger side single door 1850 x 800mm
Rear door	Triple - (centre opens first)
Front wall frame	Universal to suit off engine drive units
Side step	Fixed rung step
Rear step	Fixed plank step
Cargo track	I recessed row @ 900mm I shoring bar
Floor	One piece aluminium ricegrain
Internal light	I LED sensor light
Refrigeration	*Thermo King SV-400

-20°C*

14.57m³



Thermal efficiency 'K' VALUE .37 W/m²K tested to Australian Standard AS4982

Standard Inclusions


- High density polyurethane insulation •
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame


- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor light
- Rubber bump stops

Rear/side grab handles

Model No: A4060N-ACEHI

- Recessed load restraint track
- Moulded plastic mudguards
- Options available to suit customer requirements

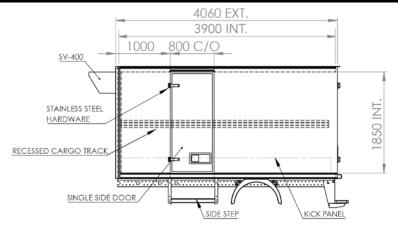



STE/TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: STE/TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.05.2025). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4-year warranty is for the Thermaxx Advantage products only. *-2.0°C is based on an average ambient temperature. Note this can fluctuate depending on the region traveling and time of year - also the amount of door opening per day.