



MODEL: **A4200P Premium**

Temperature Capacity  
-20°C\*

Cubic Capacity  
19.38m<sup>3</sup>

**THERMAXX**

THE ADVANTAGE IS TO YOUR BOTTOM LINE

#### BODY DIMENSION

|                 |                   |
|-----------------|-------------------|
| External length | 4200mm            |
| External width  | 2490mm            |
| External height | 2200mm            |
| Internal length | 4020mm            |
| Internal width  | 2410mm            |
| Internal height | 2000mm            |
| Pallet loading  | 6 Pallet capacity |

**Fitted body weight** \*1428kg

#### PANELS THICKNESS

|                       |       |
|-----------------------|-------|
| Roof/floor            | 100mm |
| Front wall            | 100mm |
| Side walls/side doors | 40mm  |
| Rear doors            | 80mm  |

|                  |                                                       |
|------------------|-------------------------------------------------------|
| Side door        | Passenger side pallet door<br>2000 x 1400mm           |
| Rear door        | Triple - (centre opens first)                         |
| Front wall frame | Universal to suit off engine or<br>diesel drive units |
| Side step        | Fixed rung step                                       |
| Rear step        | Fixed plank step                                      |
| Cargo track      | 1 recessed row @ 800mm<br>1 shoring bar               |
| Floor            | One piece aluminium ricegrain                         |
| Internal light   | 2 LED sensor lights                                   |
| Refrigeration    | *Thermo King SV-600                                   |





Thermal efficiency 'K' VALUE .59 W/m<sup>2</sup>K tested to Australian Standard AS4982

### Standard Inclusions

### Model No: A4200P - ADEHI PREMIUM

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mudguards
- Alloy kick panel
- Options available to suit customer requirements

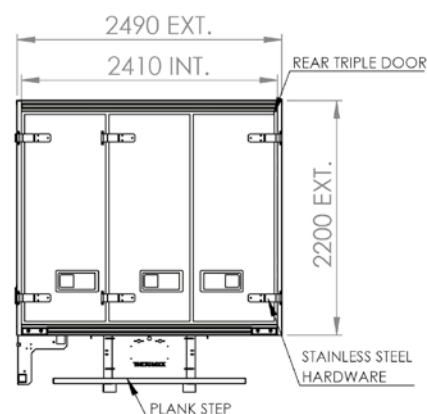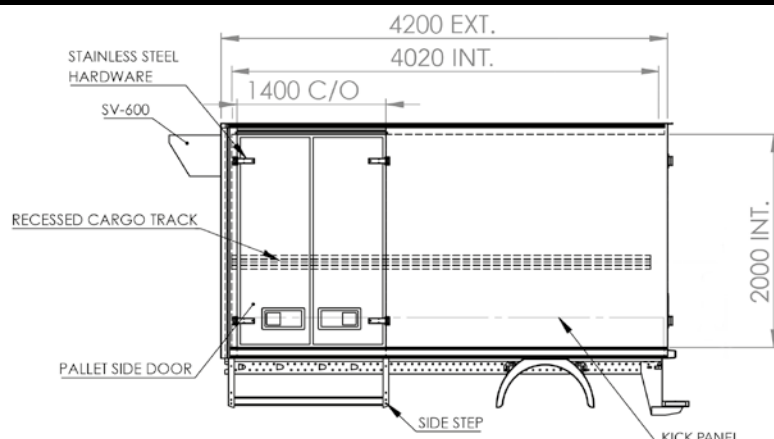

STE/TRS/ThermoMaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the ThermoMaxx product. Please note: STE/TRS/ThermoMaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.05.2025). \*Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and/or extra body equipment added. The 4-year warranty is for the ThermoMaxx Advantage products only. \*-20°C is based on an average ambient temperature. Note this can fluctuate depending on the region traveling and time of year - also the amount of door opening per day.