

THERMAXX

## THE ADVANTAGE IS TO YOUR BOTTOM LINE

-20°C\*

44.99m<sup>3</sup>

BODY DIMENSION External length External width External height	7800mm 2490mm 2650mm
Internal length Internal width Internal height	7620mm 2410mm 2450mm
Pallet loading	12 Pallet capacity

Pallet loading	12 Pallet capacity
Fitted body weight	*2964kg
PANELS THICKNESS Roof/floor Front wall Side walls/side doors Rear doors	100mm 100mm 40mm 80mm


Side door	Passenger side pallet door 2450 × 1400mm
Rear door	Double - (left opens first)
Front wall frame	Universal to suit diesel drive units
Side step	Fixed rung step
Rear step	Heavy duty crash bar
Cargo track	2 recessed rows @ 800-1400mm 2 shoring bars
Floor	One piece aluminium ricegrain
Internal light	3 LED sensor lights
Refrigeration	*Thermo King T-1000R



## Thermal efficiency 'K' VALUE .57 W/m<sup>2</sup>K tested to Australian Standard AS4982

## **Standard Inclusions**

- High density polyurethane insulation •
- European design
- European construction
- Low tare weight
- Higher legal payload Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Model No: A7800-BDEHI
  - Rear/side grab handles Recessed load restraint track
  - Moulded plastic mudguards
  - Alloy kick panel
  - Options available to suit customer requirements

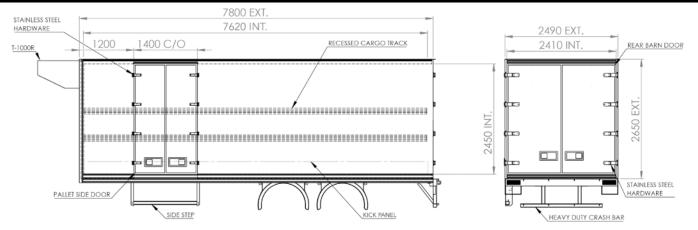

STE/TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: STE/TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.05.2025). \*Fitted body weight is an approximate weight based on the standard products supplied Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4-year warranty is for the Thermaxx Advantage products only. \*\*-20°C is based on an average ambient temperature. Note this can fluctuate depending on the region traveling and time of year - also the amount of door opening per day.