

THERMAXX THE AI	ADVANTAGE IS TO YOUR	
External length External width External height	9000mm 2490mm 2650mm	
Internal length Internal width Internal height	8820mm 2410mm 2450mm	
Pallet loading	14 Pallet capacity	
Fitted body weight	*3420kg	
PANELS THICKNESS Roof/floor Front wall Side walls/side doors Rear doors	100mm 100mm 40mm 80mm	

OTTOM LINE	-20°C*	52.08m³	
Side door	Passenger side pallet door 2450 × 1400mm		
Rear door	Double (left opens first)		
Front wall frame	Universal to suit diesel drive units		
Side step	Fixed rung step		
Rear step	Heavy duty crash bar		
Cargo track	2 recessed rows @ 800-1400mm 2 shoring bars		
Floor	One piece aluminium ricegrain		
Internal light	4 LED sensor lights		
Refrigeration	*Thermo King T-1200R		




Thermal efficiency 'K' VALUE .55 W/m2K tested to Australian Standard AS4982

Standard Inclusions

- High density polyurethane insulation •
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles

Model No: A9000P - BDEHI

- Recessed load restraint track
- Moulded plastic mudguards
- Alloy kick panel
- 2 Lock rods per door
- Options available to suit customer requirements

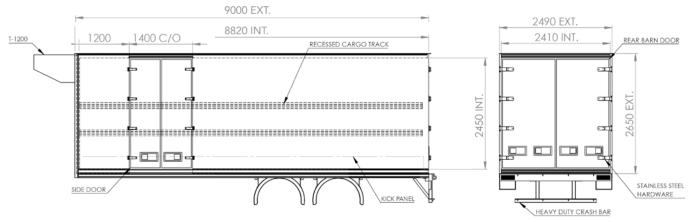

STE/TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: STE/TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.05.2025). *Fitted body weight is an approximate weight based on the standard products supplied Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4-year warranty is for the Thermaxx Advantage products only. *2.0°C is based on an average ambient temperature. Note this can fluctuate depending on the region traveling and time of year - also the amount of door opening per day.