

THERMAXX I HE AL	DVANTAGE IS TO YOUR
BODY DIMENSION External length External width External height	7850mm 2490mm 2650mm
Internal length Internal width Internal height	7620mm 2410mm 2450mm
Pallet loading	12 Pallet capacity
Fitted body weight	*3218kg
PANELS THICKNESS Roof/floor Front wall Side walls/side doors	100mm 100mm 40mm


Side door	N/A
Rear door	65mm freezer rated roller door with galvanised frame
Front wall frame	Universal to suit diesel drive units
Side step	N/A
Rear step	Heavy duty crash bar
Cargo track	2 recessed rows @ 800-1400mm 2 shoring bars
Floor	One piece aluminium ricegrain
Internal light	3 LED sensor lights
Refrigeration	*Thermo King T-1000R



Thermal efficiency 'K' VALUE .64 W/m²K tested to Australian Standard AS4982

Standard Inclusions

- High density polyurethane insulation •
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals on roller door •
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Model No: A7850P-EHO
 - Moulded plastic mudguards
 - Alloy kick panel
 - Heavy duty galvanised rear door frame
 - Options available to suit customer requirements

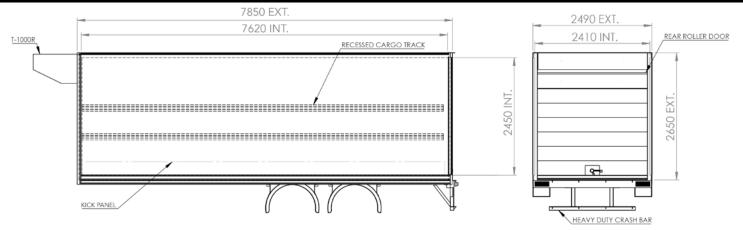

STE/TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: STE/TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.05.2025). *Fitted body weight is an approximate weight based on the standard products supplied Note: final weight may vary based on the type of cab chassis used, and or extra body equipment added. The 4-year warranty is for the Thermaxx Advantage products only. **-20°C is based on an average ambient temperature. Note this can fluctuate depending on the region traveling and time of year - also the amount of door opening per day.